

PRECISE CUTTING WITH THE VEKTA RAZER^{S5}

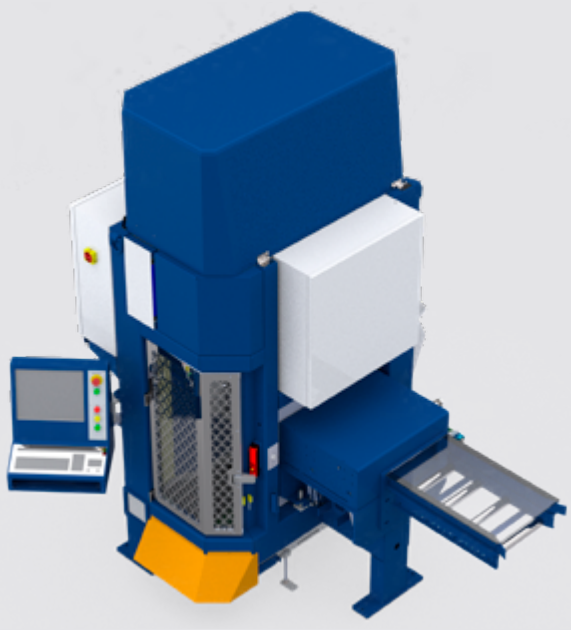


VEKTA RAZER^{S5}

SIDE VIEW



TOP VIEW



Manufactured to the same exacting standards as the Razer V5, the Razer S5 is simplified to suit a plant primarily interested in cutting common roof truss components and basic, non-raking wall frames.

The result is a less expensive linear saw with features tailored specifically to truss plants.

Features

- Compatible with ALL NAIL PLATE SOFTWARE
- The industry's smallest footprint
- Customizable to suit your factory processes; material flow, multiple layout options, location of waste conveyor and dust extraction
- Unsurpassable accuracy and precise cutting that ensures products are to correct specifications

Options

- Modular – automated or manual infeed and outfeed options to suit your budget and needs
- Integrate one or more saws into Vekta's Direct Delivery System

Specifications: RAZER S5

Throughput*	250-350 truss comps. per hour 400-550 frame comps. per hour
Cut accuracy*	+-1/16" typical
Cutting width – max.	14" (6" for double stacks)
Cutting depth – max.	3 ¾" (single or double stack)
Cutting length – max.	Unlimited
Lumber length – min.	2' 7"
Member length – min.	<1/16"
Main cut angle	0 to 180°
Bevel cut angle**	45°
Cut types	Straight, Single/Compound Bevel, Taper, Birdsmouth (under/overcut), Rip, Bevel Rip
Number of cuts per member	Unlimited
Power & air req.	3ph, 415/480 VAC +/- 10%, 50 Amp, 50/60 Hz 400 l/min at 690 kPa (14 cfm at 100 psi)

* Actual results are site dependent with consideration to lumber condition and member geometries

** Actual bevel limits based on lumber thickness and saw head tools